



**SOLUTION**


L&L Bond/L&L Seal

**VERSION**

December 2020

SELECTOR GUIDE

# Room Temperature Curing Adhesives & Elastic Sealants.

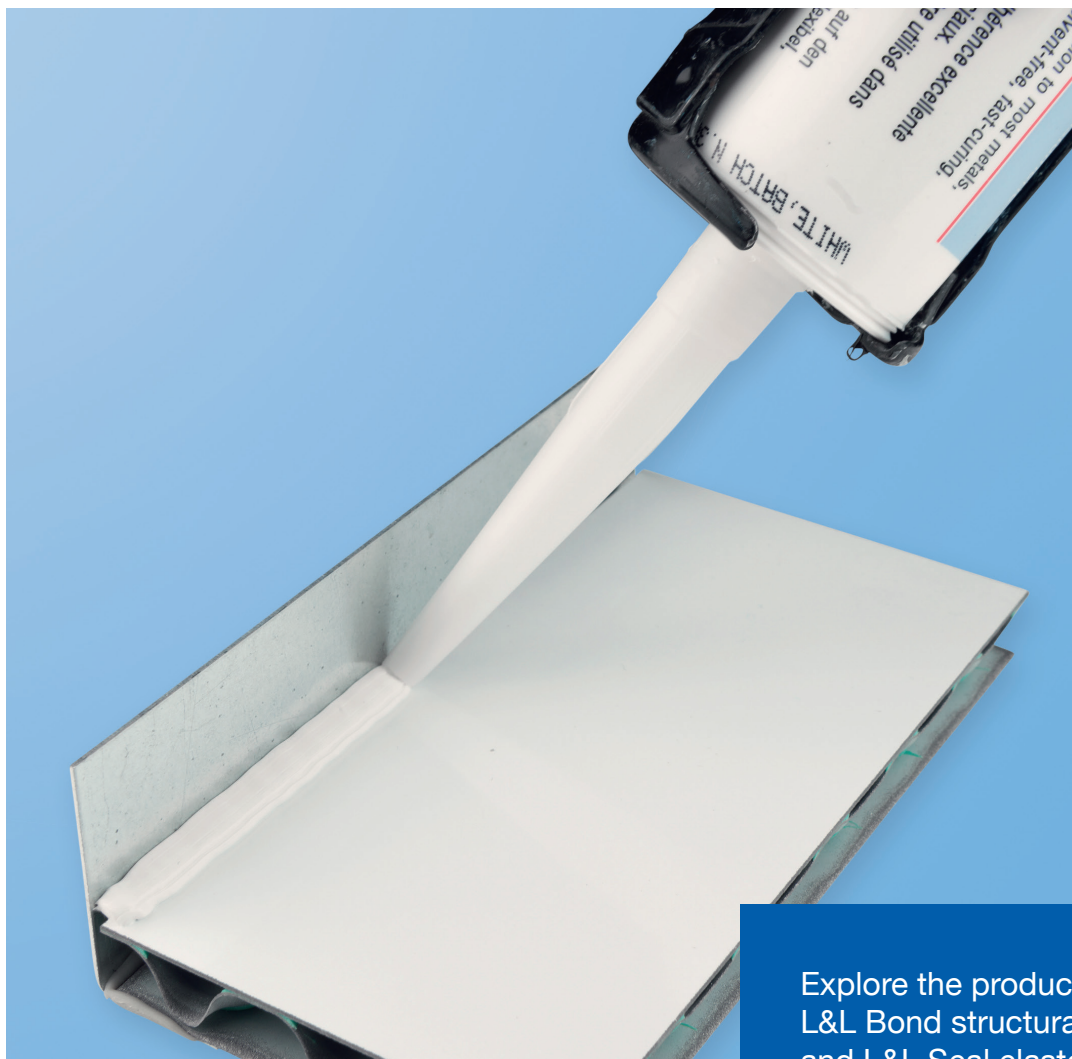

Explore the product ranges for L&L Bond structural adhesives and L&L Seal elastomeric adhesives and sealants.



**A-K Series**

The L&L Bond A-K series of structural adhesives are a range of high performance, products formulated to provide durable, high-strength structural bonds on a wide variety of substrates. Two-component, fast curing structural adhesives are in widespread use in a number of industries such as the automotive, commercial vehicle, rail transport and wind energy, where they provide structural bonds in assemblies that require joining of many different materials. The L&L Bond A-K series offers grades for a variety of demanding requirements to offer the optimum adhesive for each application.

Product	Product description	Certification	Colors	Chemistry	Mix ratio	Open time	Fixture time	Maximum gap	Lap-shear strength	Tensile strength	Modulus (MPa)	Elongation at break	Cold rolled steel	Stainless steel	Electro galvanized steel	Hot dip galvanized steel	Aluminium	ABS	PMMA	PVC	GRP	CFRP	Gelcoats	SMC
A-K583	Fast-curing, non-sag adhesive with excellent adhesion to metals, composites & plastics with unlimited gap filling capabilities	■	Tan/Black	MMA	10:1	5–7 min.	7–12 min.	>100mm	20 MPa	18–22 MPa	1000–1300	15–25 %	●	●	–	–	●	●	●	●	●	●	●	●
A-K585	Non-sag general purpose MMA bonding for metals, composites & plastics with unlimited gap filling capabilities		Tan/Black	MMA	10:1	15–20 min.	25–35 min.	>100mm	19 MPa	18–22 MPa	1000–1300	25–35 %	●	●	–	–	●	●	●	●	●	●	●	●
A-K090	Fast curing, non-sag adhesive specially designed for galvanized steel bonding	■	Tan/Amber	MMA	1:1	4–7 min.	18–22 min.	5 mm	17 MPa	24.5 MPa	1450	30–45 %	●	●	●	●	●	●	●	●	●	●	●	–
A-K348	Fast-curing non-sag impact resistant MMA with high elongation and excellent adhesion to metals, composites & plastics		Grey	MMA	10:1	3–6 min.	8–10 min.	13mm	18 MPa	15.5 MPa	550	70 %	●	●	–	–	●	●	●	●	●	●	●	●
A-K349	Medium-curing non-sag MMA with high elongation and excellent adhesion to metals, composites & plastics	■	Black/Grey	MMA	10:1	8-11 min.	16–23 min.	15 mm	17-21 MPa	14-17 MPa	500	70 %	●	●	–	–	●	●	●	●	●	●	●	●
A-K321	Low odor, fast curing, high impact resistant MMA with low read through and unlimited gap fill capabilities	■	Tan/Black	MMA	10:1	4–6 min.	7–12 min.	>100mm	20 MPa	17–19 MPa	700–900	70–90 %	●	●	–	–	●	●	●	●	●	●	●	●
A-K322	Low odor, medium open time, high impact resistant MMA with unlimited gap fill capabilities	■	Tan/Black	MMA	10:1	12–16 min.	25–32 min.	>100mm	18 MPa	16–18 MPa	800–900	70–90 %	●	●	–	–	●	●	●	–	●	●	●	●

Product	Product description	Certification	Colors	Chemistry	Mix Ratio	Open time at RT	Gel time at RT	Fixture time at RT	Fixture time at 65°C	Lap shear strength at RT	Lap shear strength at 120°C	Tensile strength	Modulus	Elongation (%)	HPL	Aluminium*	Stainless steel*	GRP	CFRP	Phenolics	Wood
A-K432	Low viscosity epoxy adhesive with high strength and heat resistant properties	■	Amber	Epoxy	2:1	80–90min.	90 min.	1 day	60 min.	25 MPa	> 5 MPa	20 MPa	2800 MPa	1	●	●	●	●	●	●	●
A-K434	Fast curing epoxy adhesive with high strength and heat resistance		Off white	Epoxy	2:1	4–6 min.	15 min.	90–110 min.	2–5 min.	27 MPa	> 5 MPa	26 MPa	3400 MPa	1	●	●	●	●	●	●	●

\* surface preparation needed



**A-J Series**

The L&L Seal A-J Series elastomeric adhesives/sealants are a range of high performance, room temperature curing paste materials formulated to provide durable elastic sealing bonds on a wide variety of substrates. Elastomeric adhesive/sealants are used in the automotive, commercial vehicle and rail industry, where they provide highly flexible adhesive bonds in assemblies that require thick joint lines that absorb a lot of movement or are subject to high mechanical

forces. They also provide reliable sealing of joint lines against the ingress of liquids, forming an integral part of the anti-corrosion strategy of such assemblies. Elastic joints can also act as acoustic decouplers. The L&L Seal A-J Series offers robust primerless adhesion on various substrates ranging from – but not limited to – common composites, metals and fibreglass.

Product	Product description	Certification	Colors	Chemistry	Tack-free time	Cure rate	Shore A hardness	Over paintable	UV-resistant	Tensile strength	Elongation at break	Cold rolled steel	Stainless steel	Aluminium	Electro galvanized steel	Hot dip galvanized steel	ABS	Glass	GRP
A-J115*	Multi-purpose, no solvent PU-adhesive with superior gap filling properties and long open time	■ ■	Black	PU	30-40min.	2–3mm/24h	55-65 approx.	Yes	Yes	7 - 10 MPa	450 %	●	●	●	●	●	●	●	●
A-J215	Multi-purpose adhesive/sealant. Isocyanate & solvent-free	■ ■	Black, White, Grey	SMP	30 min.	3–3.5 mm/24h	50 approx.	Yes	Yes	2.0 MPa	250 %	●	●	●	●	●	●	●	●
A-J235	Structural elastic adhesive. Isocyanate & solvent-free		Black	SMP	15 min.	3–4 mm/24h	60 approx.	Yes	Yes	3.8 MPa	350 %	●	●	●	●	●	●	●	●

# Engineered Innovation.

The information contained herein is, to the best of our knowledge and belief, accurate and reliable as of the date compiled. However, no representation, warranty, or guarantee is made regarding its accuracy, reliability, or completeness by L&L Products, Inc. or any of its affiliates.

It is the responsibility of the user to assure the suitability and completeness of such information and any depicted product for the particular use of the user. L&L Products, Inc. and its affiliates accept no liability for any loss or damage that may occur from the use of this information or any depicted product. L&L Products, Inc. and its affiliates specifically and expressly disclaim any and all warranties, express or implied, including warranties of merchantability, fitness for a particular purpose, and freedom from claims of infringement of the rights of others associated with the sale or use of any product depicted.

L&L Products, Inc. and its affiliates further disclaim any liability for consequential or incidental damages of any kind, including lost profits.

## CONTACT

info.america@llproducts.com  
info.australia@llproducts.com  
info.brazil@llproducts.com  
info.china@llproducts.com  
info.czechrepublic@llproducts.com  
info.europe@llproducts.com  
info.india@llproducts.com  
info.korea@llproducts.com  
info.turkey@llproducts.com