



T-LINK TECHNOLOGY

BEYOND LIMITS

An advanced engineering thermoplastic resin with excellent adhesive properties for ultimate performance and processability.

FILM

DRY-TO-THE-TOUCH FOR EASY HANDLING

T-Link™ film is a dry-to-the-touch, engineered thermoplastic adhesive that demonstrates 99 % optical clarity, therefore, does not disrupt intended color and allows for light transmission where applicable.


T-Link™ film can be processed with traditional press equipment, has a short cycle time for bonding, does not require refrigeration, and has a long shelf life. Additionally, it has a low odor and is paintable.

Melt Index (dg/min @ 190°C): 10

PRODUCT	GRADES	WHAT DOES IT ENABLE
FILM (L-F610)	<ul style="list-style-type: none"> - 2.5 mil Thickness¹ - 5 mil Thickness¹ - 10 mil Thickness¹ 	<ul style="list-style-type: none"> - Dry, easy to handle product - Provides consistent and more efficient delivery of resin system for composite manufacturing
PERFORATED FILM	<ul style="list-style-type: none"> - 2.5 mil Thickness² - 5 mil Thickness² 	<ul style="list-style-type: none"> - Lighter weight drapable film

¹ Commercially Available

² Development Stage

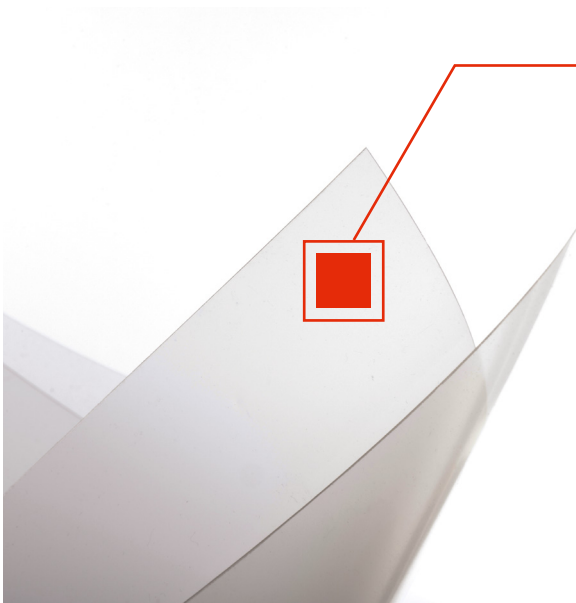

KEY PRODUCT ATTRIBUTES

- High strength, rigidity, and toughness
- High strain-to-failure – up to 40 %
- Short cycle times needed for bonding
- Long shelf life
- Can be stored at room temperature
- Flexible, clear, and low odor
- Fully thermoplastic
- Recyclable
- Repairable/formable
- Debonding/healing capability
- Paintable and printable