



T-LINK TECHNOLOGY

# BEYOND LIMITS

An advanced engineering thermoplastic resin with excellent adhesive properties for ultimate performance and processability.

# FILM

**DRY-TO-THE-TOUCH FOR EASY HANDLING**


T-Link™ film is a dry-to-the-touch, engineered thermoplastic adhesive that demonstrates 99 % optical clarity, therefore, does not disrupt intended color and allows for light transmission where applicable.

T-Link™ film can be processed with traditional press equipment, has a short cycle time for bonding, does not require refrigeration, and has a long shelf life. Additionally, it has a low odor and is paintable.

Melt Index (dg/min @ 190°C): 10

PRODUCT	GRADES	WHAT DOES IT ENABLE
<b>FILM</b> (L-F610)	<ul style="list-style-type: none"> <li>- 2.5 mil Thickness<sup>1</sup></li> <li>- 5 mil Thickness<sup>1</sup></li> <li>- 10 mil Thickness<sup>1</sup></li> </ul>	<ul style="list-style-type: none"> <li>- Dry, easy to handle product</li> <li>- Provides consistent and more efficient delivery of resin system for composite manufacturing</li> </ul>

<sup>1</sup> Commercially Available

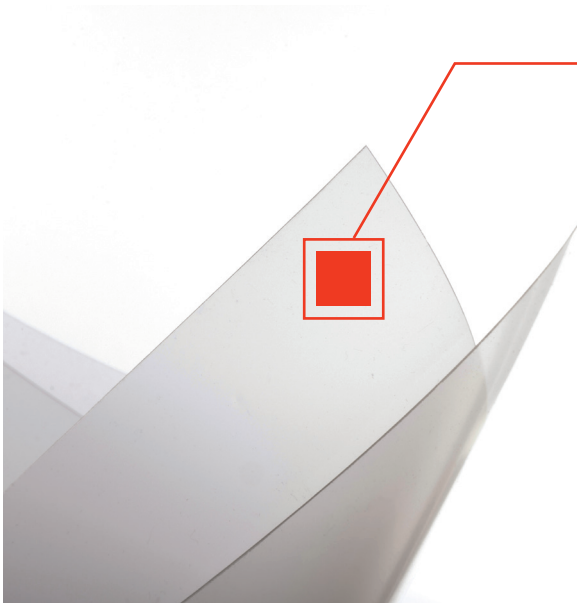

**KEY PRODUCT ATTRIBUTES**

- High strength, rigidity, and toughness
- High strain-to-failure – up to 40 %
- Short cycle times needed for bonding
- Long shelf life
- Can be stored at room temperature
- Flexible, clear, and low odor
- Fully thermoplastic
- Recyclable
- Repairable/formable
- Debonding/healing capability
- Paintable and printable