




# L-9007

## FST Foaming Adhesive Technology

L-9007 FST (Fire, Smoke, and Toxicity compliant) foaming adhesive has been developed for a range of honeycomb core finishing operations. In addition to core splicing it can be readily used for edge close out and radius enhancement.

Depending on the cure schedule chosen, L-9007 will expand up to 120%.

It can be supplied in various material shapes. The standard format is in sheets of 560mm x 300mm x 1.27mm but it can also be cut into strips.

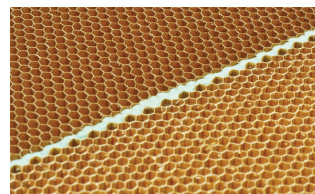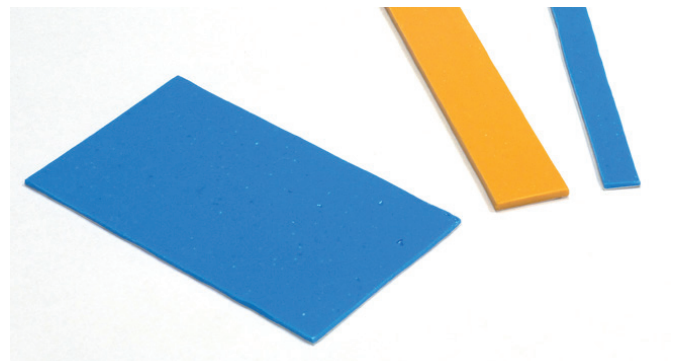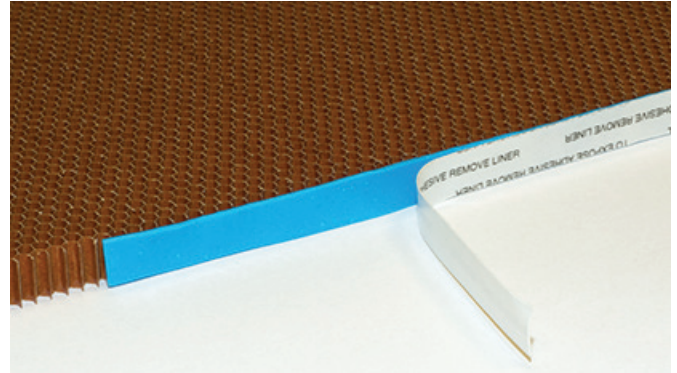

### Key Product Attributes

- Qualified to FMS 4010 class 3
- FST regulations compliant - FAR 25,853
- Lightweight
- Smooth curing, reduced post process machining
- Thermo-foaming materials
- Multiple final densities available
- Compatible with a broad range of honeycombs, phenolic, and epoxy prepregs
- Pressure sensitive adhesive

### Typical Application Areas

- Core splicing
- Edge close out
- Local edge reinforcement
- Radius enhancement

## Technical Data

The following information and data should be considered typical and should not be used for specification.

TYPICAL PROPERTIES				
		Curing Cycle	L-9007	Test Method
Physical Properties	Color	-	Tan	-
	Uncured Density	-	1.25 g/cc	-
	Final Density	Autoclave at 125°C [257°F] *	0.90 g/cc [56 lbs/ft <sup>3</sup> ]	-
	Final Density	12 min at 160°C [320°F] **	0.56 g/cc [36 lbs/ft <sup>3</sup> ]	77 lbs/ft <sup>3</sup>
	Slump	Autoclave at 125°C [257°F]	0.5 mm	DIN EN 2667-4
	Volatiles	12 min at 160°C [320°F]	<1.5%	DIN EN 2558
	Expansion	Autoclave at 125°C [257°F]	70%	DIN EN 2667-3
	Expansion	12 min at 160°C [320°F]	120%	DIN EN 2667-3
Mechanical Properties	Compressive Strength at 23°C [75°F]	Autoclave at 125°C	19 MPa [2,750 psi]	ISO 604
	Compressive Modulus at 23°C [75°F]	Autoclave at 125°C	0.63 GPa [91.4 ksi]	ISO 604
	Tube Shear at 23°C [75°F]	Autoclave at 125°C	9 MPa [1,305 psi]	DIN EN2667-2
	Tube Shear at 85°C [185°F]	Autoclave at 125°C	8 MPa [1,160 psi]	DIN EN2667-2
Fire Properties	Vertical Burn 60 s (6.35mm) [1/4 in]	Autoclave at 125°C	<75 mm [3 in]	FAR 25.853 (a) App. F Part I §(b)(1)(2)(3)(4)
	Smoke Density (6.35mm) [1/4 in]	Autoclave at 125°C	< 200 DS	FAR 25.853 (d) App. F Part V
	Smoke Toxicity (6.35mm) [1/4 in]	Autoclave at 125°C	Compliant	

### Optimal Curing Cycle

- \* Autoclave: 125°C [257°F] for 60 min with 3°C / min ramp up
- \*\* Hot in / hot out: 12 min at 160°C [320°F]
- Autoclave from 121°C [250°F] up to 177°C [350°F] from 60 to 120 min with 3°C / min ramp up are also possible
- For other curing cycle, please contact L&L's technical support

### Shelf Life & Storage Conditions

- Shelf Life: 2 years from date of manufacture when stored at or below -18°C (0°F)
- Shelf life at room temperature: 10 days
- Handle with care at low temperature as the material can be brittle

- Before use, let the material reach room temperature in its sealed packaging to avoid moisture uptake
- Best handling around room temperature

### Health & Safety

- Consult product specific Safety Data Sheet
- All of our products are developed with REACH compliance

The information contained herein is, to the best of our knowledge and belief, accurate and reliable as of the date compiled. However, no representation, warranty, or guarantee is made regarding its accuracy, reliability, or completeness by L&L Products or any of its affiliates. It is the responsibility of the user to assure the suitability and completeness of such information and any depicted product for the particular use of the user. L&L Products and its affiliates accept no liability for any loss or damage that may occur from the use of this information or any depicted product. L&L Products and its affiliates specifically and expressly disclaim any and all warranties, express or implied, including warranties of merchantability, fitness for a particular purpose, and freedom from claims of infringement of the rights of others associated with the sale or use of any product depicted. L&L Products and its affiliates further disclaim any liability for consequential or incidental damages of any kind, including lost profits.