

 L&L Products



BEYOND LIMITS

T-LINK[®]

An advanced engineering thermoplastic adhesive
for ultimate performance and processability.

lproducts.com/t-link

FILM

DRY-TO-THE-TOUCH FOR EASY HANDLING


T-Link® film is a dry-to-the-touch, engineered thermoplastic adhesive. It does not disrupt the intended color and allows for light transmission where applicable.¹

T-Link® film can be processed with traditional press equipment, has a short cycle time for bonding, does not require refrigeration, and has a long shelf life. Additionally, it has a low odor and is typically paintable.

¹ Not intended for exterior UV exposure.

PRODUCT	MELT INDEX g/min @ 190°C	THICKNESS	WHAT DOES IT ENABLE
FILM (L-F610)	10 10	2.5 mil [63 µm]* 5 mil [127 µm]*	<ul style="list-style-type: none"> - Dry, easy-to-handle product - Provides consistent and efficient delivery of resin system for composite manufacturing

* Commercially Available

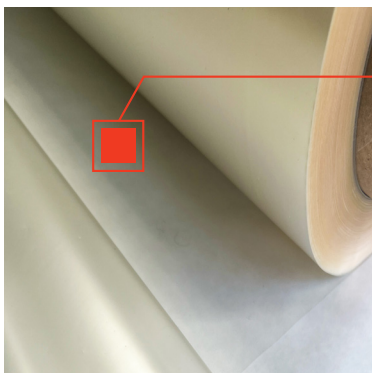

KEY PRODUCT ATTRIBUTES

- High modulus
- High strain-to-failure – up to 40 %
- Short cycle times needed for bonding
- Long shelf life
- Can be stored at room temperature
- Bonds to a wide range of dissimilar substrates
- No cold storage required
- Flexible, clear, and low odor
- Fully thermoplastic
- Recyclable
- Bonding/debonding
- Paintable and printable



Scan for disclaimer